

Data Sheet

VES-AD-SMAWR112

Coax to Waveguide Adapter

WR112 7050-10000 MHz

Feature

- Transitions SMA to WR-112
- Waveguide size WR112
- Flange Square type
FBP84
- Impedance 50 Ohms
- Body Geometry Right Angle



Applications

- Radar Systems
- Communication Systems
- Microwave Radio Systems
- Military and Space

Electrical Specifications

Parameter	Min	Typ	Max	Unit
Frequency Range	7.05	-	10	GHz
VSWR			1.2	:1

Mechanical Specifications

Description	RF Connector	Waveguide Interface
Designation	Female	FBP84
Type	SMA	Square Cover
Material	Stainless Steel	Aluminum

Viet Electronic Technology Solutions (VIETES Co., Ltd)

For detailed performance specs & Shopping online see Vietes web site: www.Vietes.vn

Data Sheet

VES-AD-SMAWR112

Coax to Waveguide Adapter

WR112 7050-10000 MHz


Plot and Other Data

Notes:

- Values at +25°C, sea level.
- ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



Outline Drawing Dimensions (mm)

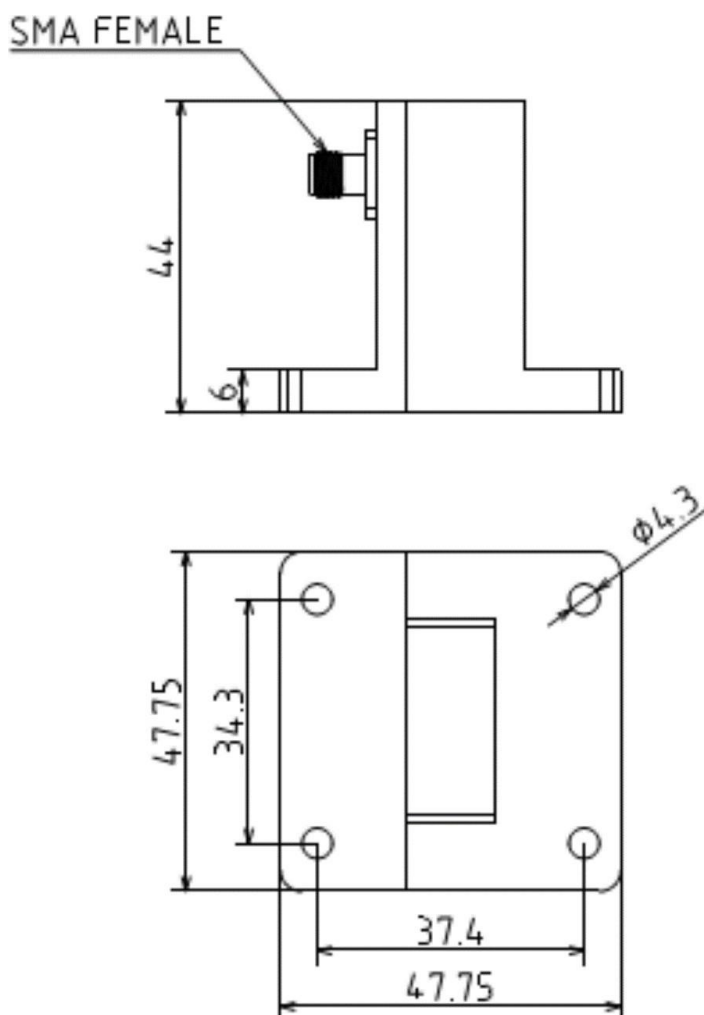

Viet Electronic Technology Solutions (VIETES Co., Ltd)

For detailed performance specs & Shopping online see Vietes web site: www.Vietes.vn

Data Sheet

VES-AD-SMAWR112

Coax to Waveguide Adapter

WR112 7050-10000 MHz



Contact us

VIET ELECTRONIC TECHNOLOGY SOLUTIONS (VIETES CO., LTD)

No. 79, Lane 193 Trung Kinh, Yen Hoa, Hanoi, Vietnam

www.vietes.vn

Email: info@vietes.vn

Viet Electronic Technology Solutions (VIETES Co., Ltd)

For detailed performance specs & Shopping online see Vietes web site: www.Vietes.vn